

# PATENT ABSTRACTS OF JAPAN

(11)Publication number : 02-043591

(43)Date of publication of application : 14.02.1990

(51)Int.Cl.

G09B 9/00

(21)Application number : 63-192737

(71)Applicant : HITACHI LTD

HITACHI ENG CO LTD

(22)Date of filing : 03.08.1988


(72)Inventor : KIKUCHI MASAHAISA

## (54) SOUND SIMULATION SYSTEM

### (57)Abstract:

**PURPOSE:** To improve a training effect by determining the output timing of an effective sound in accordance with the contents displayed on a CRT display device requested by a trainee and combining human's visual sense and audible sense to obtain a simulated result.

**CONSTITUTION:** At the time of outputting the simulated result of a simulator device 1 to the CRT display device 3 through a CRT display control device 2, the simulated contents and a sound relating to the contents are combined and outputted from a speaker 5 through a sound simulator 4 to impress more presence to the trainee. Only when the trainee person request the output of a simulated result to the CRT display 3, the simulation sound is outputted. Thus, the training effect can be improved.

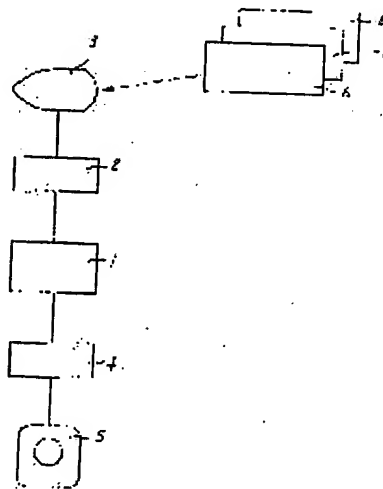

## LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than

the examiner's decision of rejection or  
application converted registration]

[Date of final disposal for application]

[Patent number]

[Date of registration]

[Number of appeal against examiner's  
decision of rejection]

[Date of requesting appeal against examiner's  
decision of rejection]

[Date of extinction of right]

PAT-NO: JP402043591A  
DOCUMENT-IDENTIFIER: JP 02043591 A  
TITLE: SOUND SIMULATION SYSTEM

----- KWIC -----

Abstract Text - FPAR (2):

CONSTITUTION: At the time of outputting the simulated result of a simulator device 1 to the CRT display device 3 through a CRT display control device 2, the simulated contents and a sound relating to the contents are combined and outputted from a speaker 5 through a sound simulator 4 to impress more presence to the trainee. Only when the trainee person request the output of a simulated result to the CRT display 3, the simulation sound is outputted. Thus, the training effect can be improved.